

# LSC0607DE

## ELECTRIC SCISSOR LIFT

Comply with CE standard



### Security and Intelligence

- Intelligent control system, real-time monitoring of equipment status;
- Multiple security protection to ensure personnel safety;
- Intelligent charging system to extend battery service life.

### Easy to Control

- Drivable at full height to improve working efficiency;
- The proportion drops and the descent moves smoothly;
- Forklift pocket, easy to load, unload and transport.

### Maintenance Friendly

- Self-lubricating sleeve;
- Swing-out tray on both sides, easy maintenance;
- Fault code indication to facilitate troubleshooting.

### Standard Features


- Standard longitudinal forklift sprocket hole
- Charging protection system
- Adjustable extension platform
- Active pothole protection
- All motion alarm
- Emergency lowering system
- Drop anti-clip function
- Side anti-collision function
- Emergency stop button
- Proportional control
- Acousto-optic warning lights
- Drivable at full height
- Folding guardrails
- Over tilt protective system



# LSC0607DE >>>



## Specifications

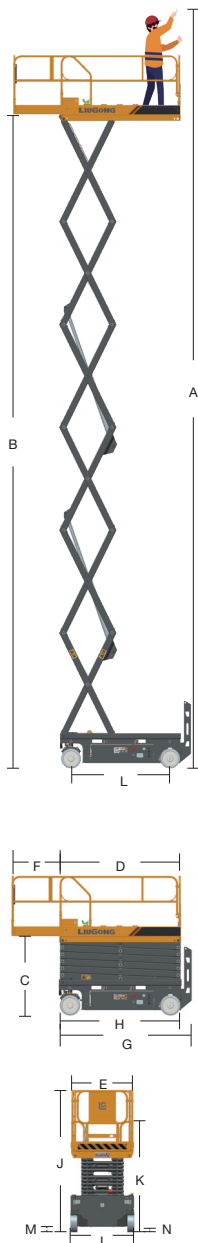

| Item                                   | Unit | LSC0607DE |
|--|------|-----------|
| Size                                   |      |           |
| A - Max.Work Height                    | m    | 7.8       |
| B - Max.Platform Height                | m    | 5.8       |
| C - Min.Platform Height                | m    | 0.95      |
| D - Platform Length                    | m    | 1.64      |
| E - Platform Width                     | m    | 0.75      |
| F - Max.Platform Extension Length      | m    | 0.9       |
| G - Overall Length                     | m    | 1.85      |
| H - Overall Length(Without Ladder)     | m    | 1.66      |
| I - Overall Width                      | m    | 0.785     |
| J - Overall Height (Rails Up)          | m    | 2.15      |
| K - Overall Height (Rails Down)        | m    | 1.72      |
| L - Wheelbase                          | m    | 1.32      |
| M - Ground Clearance (Stowed)          | mm   | 60        |
| N - Ground Clearance (Raised)          | mm   | 20        |
| Performance                            |      |           |
| Rated Load on Working Platform         | kg   | 230       |
| Safe Working Load on Extended Platform | kg   | 100       |
| Max. Occupants                         | /    | 2         |
| Travel Speed (Stowed)                  | km/h | 4         |
| Travel Speed (Raised)                  | km/h | 0.7       |
| Turning Radius (Inside)                | m    | 0         |
| Turning Radius (Outside)               | m    | 1.6       |
| Up/Down Time                           | s    | 25/20     |
| Max.Gradeability                       | /    | 30%       |
| Max. Working Slope (Lateral/Vertical)  | °    | X1.5°/Y3° |
| Tire size                              | mm   | 356x114   |
| Power                                  |      |           |
| Drive Motor                            | kW   | 0.75      |
| Battery                                | /    | 215Ah     |
| Charger                                | /    | 24V30A    |
| Weight                                 |      |           |
| Total Weight                           | kg   | 1540      |



Swing-out Tray



Emergency Lowering System



Acousto-optic Warning Lights



Steering System



Extended Platform



Safety Overhaul Bracket



Folding Guardrails



Max.Gradeability 30%